



**WARNING**



**Absolute care MUST be taken when assembling this shed, otherwise serious injury could occur.**

**PLEASE READ BOTH SIDES OF THIS SHEET**

**BEFORE ASSEMBLY**



**Protective  
gloves must  
be worn**

**Work gloves MUST be worn during assembly, we also recommend eye protection and long sleeves when assembling or performing any maintenance on your shed.**

**Care must be taken when handling any pieces of your shed, as some parts have sharp edges.**

**Keep children and pets away while assembling your shed to avoid distractions or accidents.**

**Never put your whole body weight onto the roof of your shed. When using a ladder, ensure that it is fully open and on even ground before using it.**


**Practice caution with tools being used in the assembly of your shed.**

**Do not attempt to assemble your shed if parts are missing. Even light winds can damage your shed if left partially assembled.**

**Do not attempt to assemble your shed on a windy day. The strong winds will make construction difficult and unsafe.**

**It is STRONGLY RECOMMENDED that Aluminium Tape be applied to ANY sharp edges to ensure accidental injury does not occur.**

# GARDEN SHED ASSEMBLY INSTRUCTION

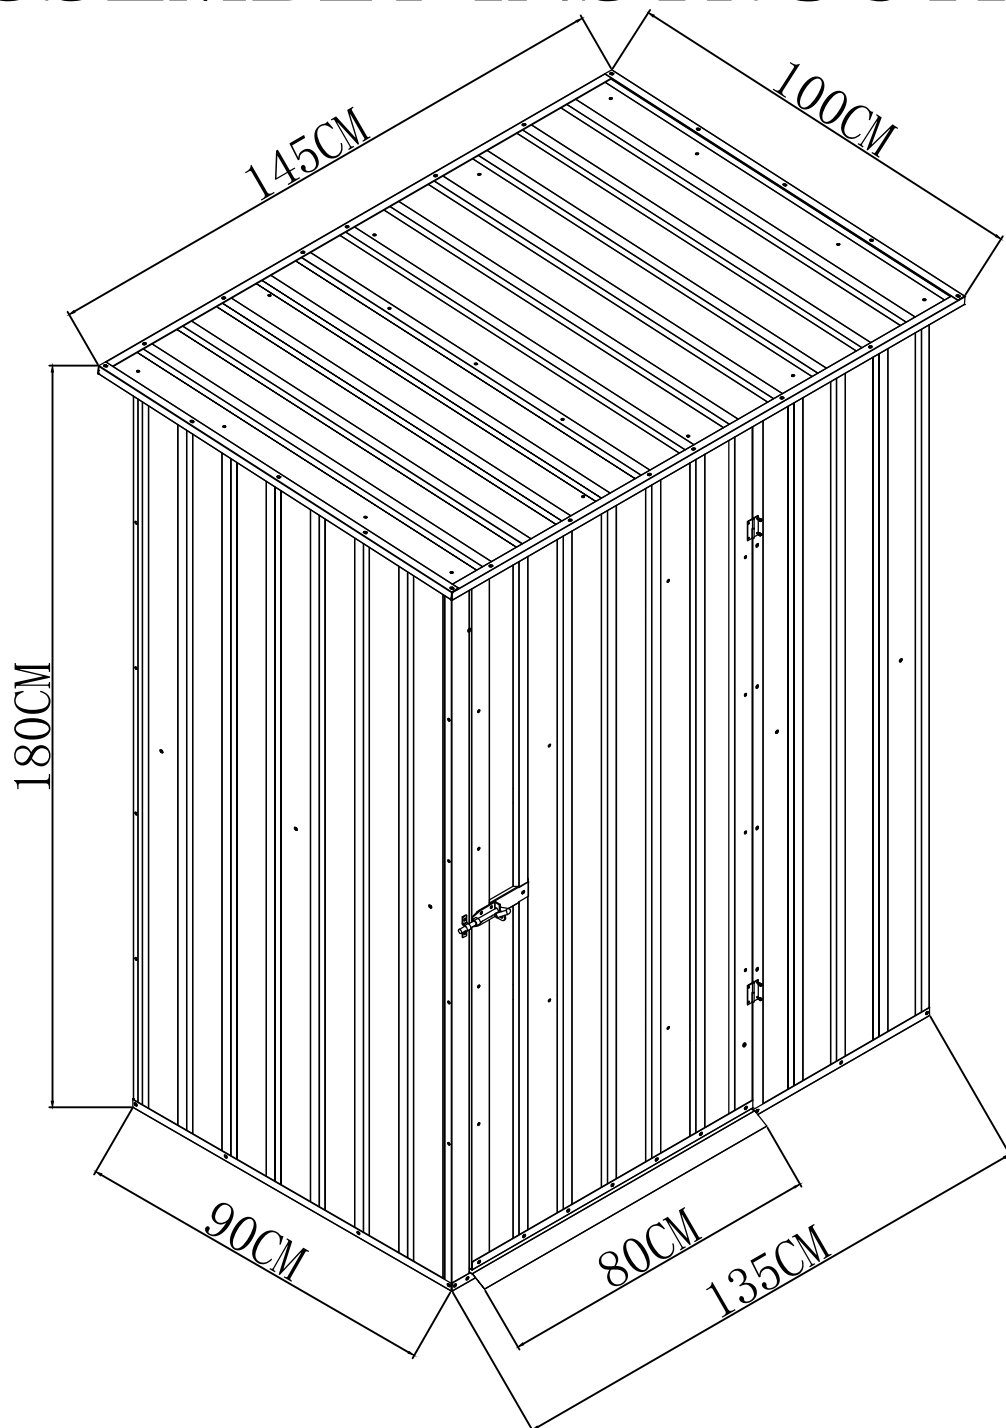

**Model number: 130918-Z**

**Size: 135x90x180cm**

**PLEASE READ THE ASSEMBLY INSTRUCTION CAREFULLY  
BEFORE USE.**

## **SAFETY FIRST**

**Safety precautions are important to follow throughout the construction of your garden shed.**

- Care must be taken when handling any pieces of your shed, as some parts may have sharp edges. Please wear work gloves, eye protection and long sleeves when assembling or performing any maintenance on your shed.
- Keep children and pets away while assembling your shed to avoid distractions or accidents.
- Never put your whole body weight onto the roof of your shed . When using a ladder, ensure that it is fully open and on even ground before using.
- Practice caution with tools being used in the assembly of your shed.
- Do not attempt to assemble your shed if parts are missing. Even light winds can damage your shed if left partially assembled.
- Do not attempt to assemble your shed on a windy day. The strong winds will make construction difficult and unsafe.

# GENERAL INSTALLATION ADVICE AND MAINTENANCE

## SELECTING AND PREPARING YOUR SITE.

- Keep work area clean and dry. Cluttered, damp, or wet work areas may cause injuries.
- Proper location: Make sure the building is located on a flat level surface. Make sure there is adequate surrounding workspace. Avoid high traffic areas. Always keep the work area free of obstructions, grease, oil, rubbish, and other debris.
- Allow enough working space for ease of moving parts into position during assembly. Be sure there will be enough space at entrance for the doors to open fully and enough space around the building to be able to fasten the panel screws from the outside.

**DO NOT INSTALL THE SHED IN AREAS SUBJECT TO HIGH WINDS OR ERECT ON A WINDY DAY.** Although this shed is designed to withstand greater wind loads than other conventional sheds, do not install it in areas subject to high winds or erect on a windy day. Any building left partially constructed may be seriously damaged if left in this state. **It is your responsibility to safely and securely anchor the shed**, having regard to the windiest conditions in the area.

**TEAMWORK.** Whenever possible, **two or more people** should work together to assemble your building. One person can position parts or panels while the other is able to handle the screws and the tools.

Assembly time is **3-5 hours**.

**CHECK PARTS BEFORE ASSEMBLY.** All parts have been labelled well, please sort, separate and identify all parts and hardware before construction, and check against the parts list in this manual.

**FOUNDATION.** Before you begin the shed assembly, please build your own foundation, we recommend you build on a concrete slab foundation.

**DOORS.** Always keep the door tracks clear of dirt and other debris that prevent them from sliding easily, keep doors closed to prevent wind damage.

**FINISH.** For long lasting finish, periodically clean and wash the exterior surface. Use touch-up paint to cover the scratches as soon as you notice them.

**DO NOT STORE CHEMICALS IN YOUR SHED.  
COMBUSTIBLES AND CORROSIVES MUST BE STORED  
IN AIR TIGHT APPROVED CONTAINER.**









## **REQUIRED TOOLS**




Below tools are required for the erection of the garden shed. These tools should be at hand before starting work




- 1.Step ladder
- 2.Spanner
- 3.Measuring tape
- 4.Cordless power screw driver
- 5.Power drill





**NOTE:** The warnings, precautions, and instructions discussed in this manual cannot cover all possible conditions and situations that may occur.






# PARTS LIST




FRONT FRAME PARTS LIST		
SKETCH	PART NO.	QTY
	F1	1
	F2	1
	F3	1
	F4	1
	F5	1
	F6	1
	F7	1
	F10	1







LEFT FRAME PARTS LIST		
SKETCH	PART NO.	QTY
	L1	1
	L2	1
	L3	1











RIGHT FRAME PARTS LIST		
SKETCH	PART NO.	QTY
	R1	1
	R2	1
	R3	1

BACK FRAME PARTS LIST		
SKETCH	PART NO.	QTY
	B1	1
	B2	2
	B3	1
	B4	1

ROOF PARTS LIST		
SKETCH	PART NO.	QTY
	T1	1
	T2	1
	T3	1
	T4	1
	T5	2



MIDDLE		
SKETCH	PART NO.	QTY
	M1	1
	M2	2
	M3	1

DOOR PARTS LIST		
SKETCH	PART NO.	QTY
	DL1	2
	DL2	1
	DL3	1
	DL5	1
	DL6	1
	DL7	1



ACCESSORIES LIST		
SKETCH	PART NO.	QTY
	W1	3
	W2-1	1
	W2-2	1
	W3	180
	W3-1	7
	W5	8
	W6	8
	W8	50
	W11	4
	W9	50

All views show  
external view

1. Position the channels over the edge of the panels.

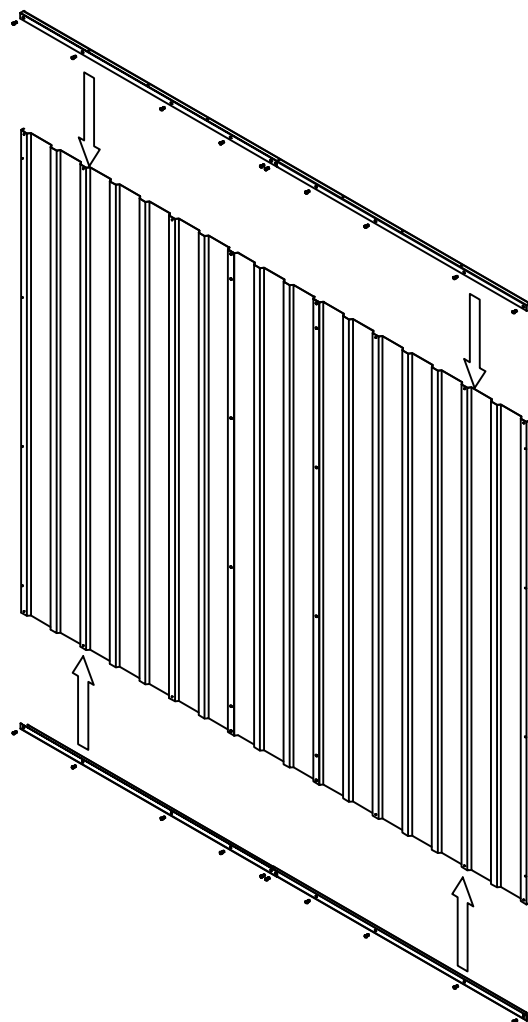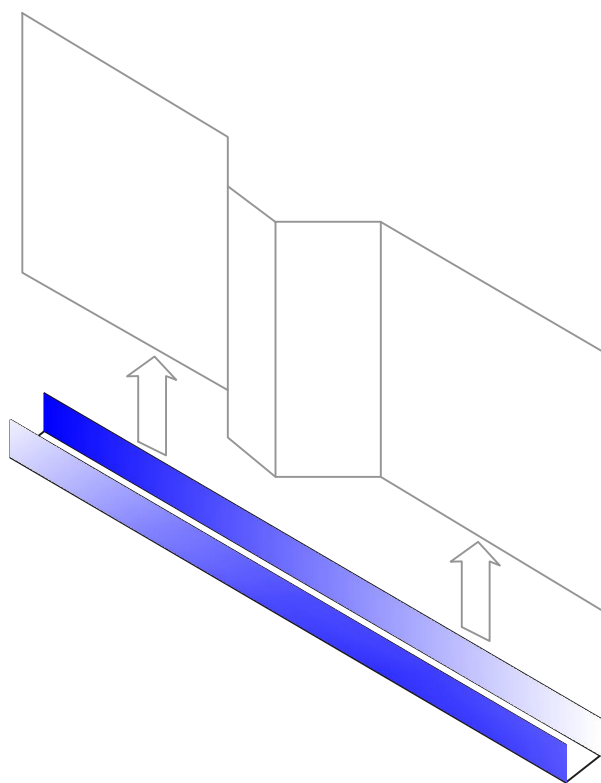



2. Front frame assembly  
Assemble wall sheet F4 to the channel F2,  
then assemble with channel F1,F3 and F7,  
and install F5 and F6 at last.

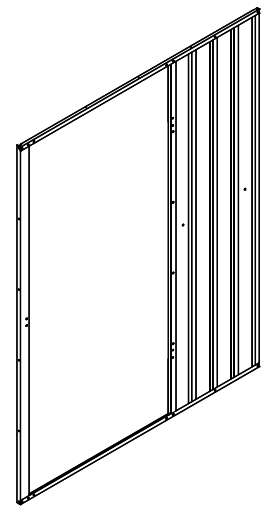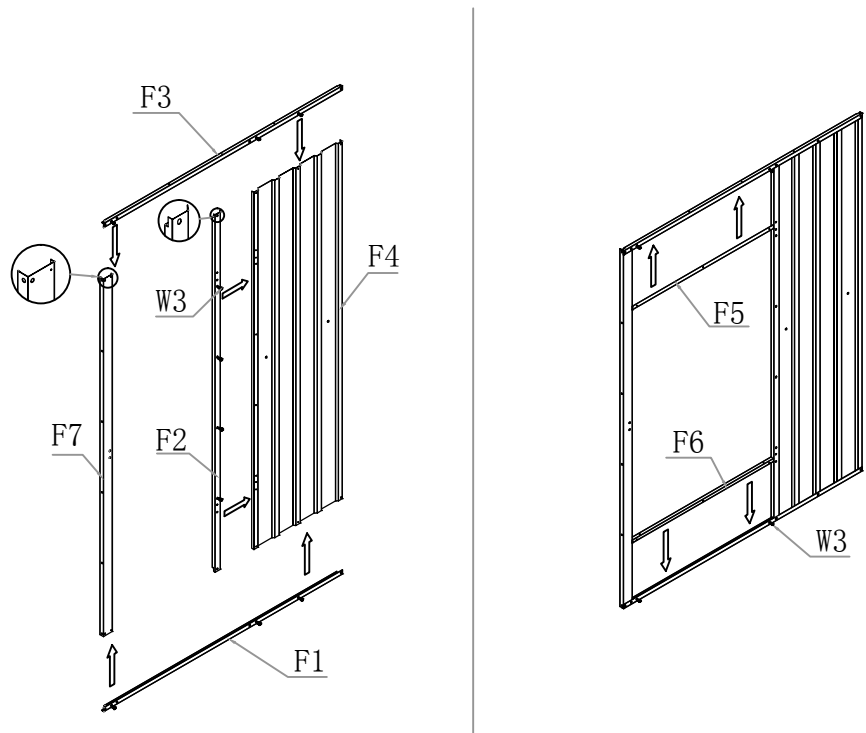

QTY: 1

SKETCH	PART NO.	QTY
	F1	1
	F2	1
	F3	1
	F4	1
	F5	1
	F6	1
	F7	1
	W3	18



3. Left frame assembly  
Connect wall sheet L3 to the channel L1 and L2  
with screws.

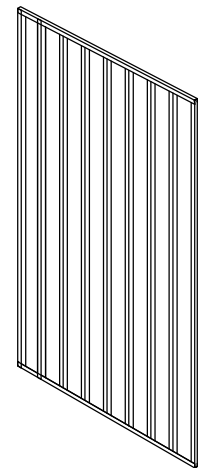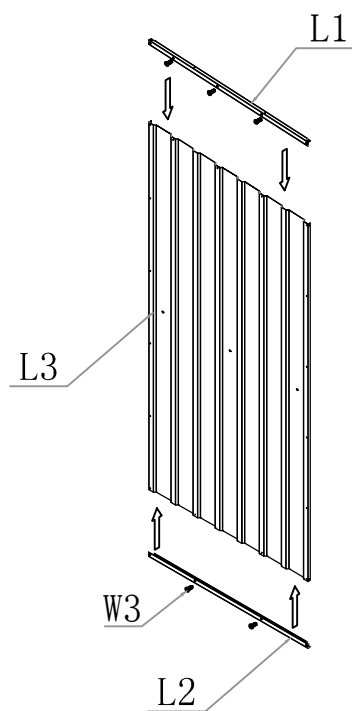

QTY: 1

SKETCH	PART NO.	QTY
	L1	1
	L2	1
	L3	1
	W3	5




4. Right frame assembly  
Connect wall sheet R3 to the channel R1 and R2 with screws.

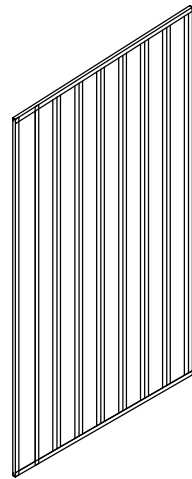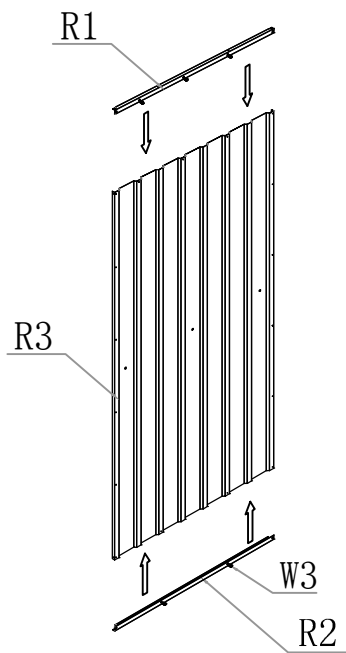

QTY: 1

SKETCH	PART NO.	QTY
	R1	1
	R2	1
	R3	1
	W3	5



5. Back frame assembly  
Connect wall sheet B1 and B2 with screws;  
then assemble with channel B3 and B4 with  
screws.

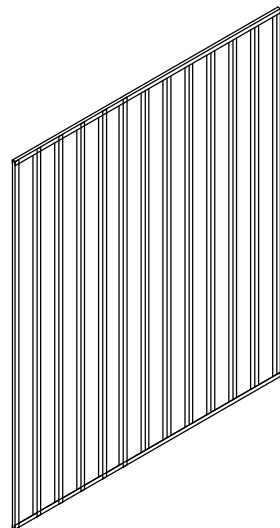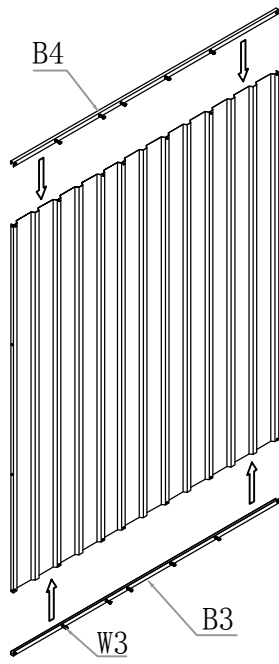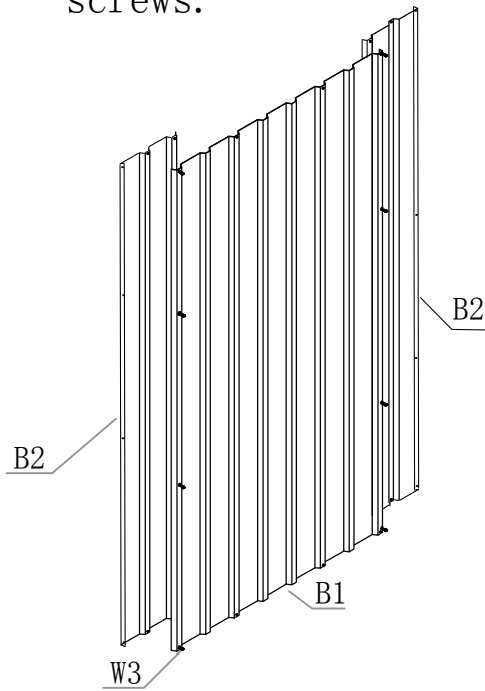

QTY: 1

SKETCH	PART NO.	QTY
	B1	1
	B2	2
	B3	1
	B4	1
	W3	18



6. TOP roof assembly  
Connect wall sheet T1 and T2 with screws;  
then assemble with channel T3, T4 and T5 with  
screws.

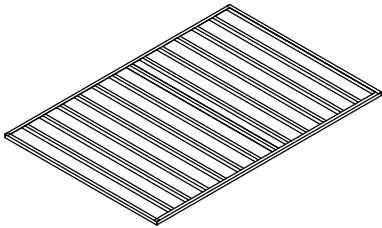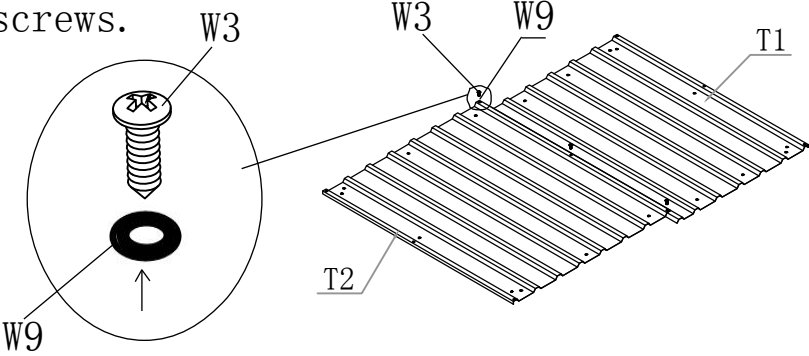

QTY: 1

SKETCH	PART NO.	QTY
	T1	1
	T2	1
	T3	1
	T4	1
	T5	2
	W3	25
	W9	25

7. When connecting front, back, left and right frame, ensure  
the larger holes are outside and smaller holes are inside.


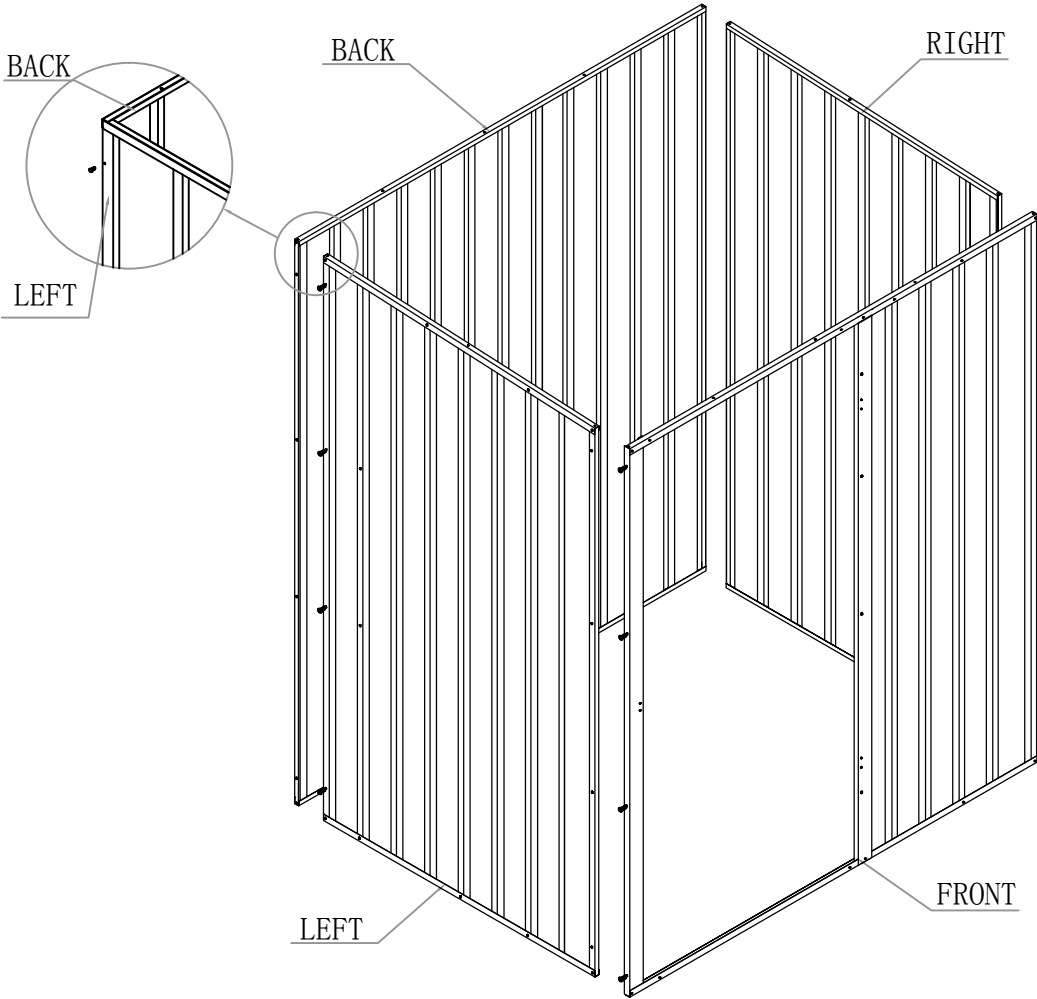


QTY: 1





SKETCH	PART NO.	QTY
	FRONT	1
	LEFT	1
	RIGHT	1
	BACK	1
	W3	36

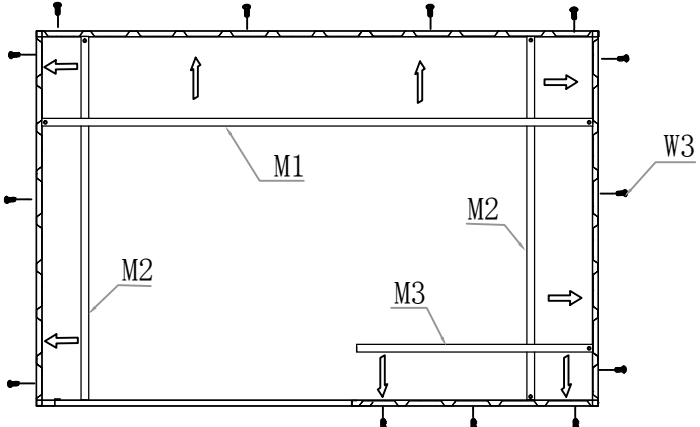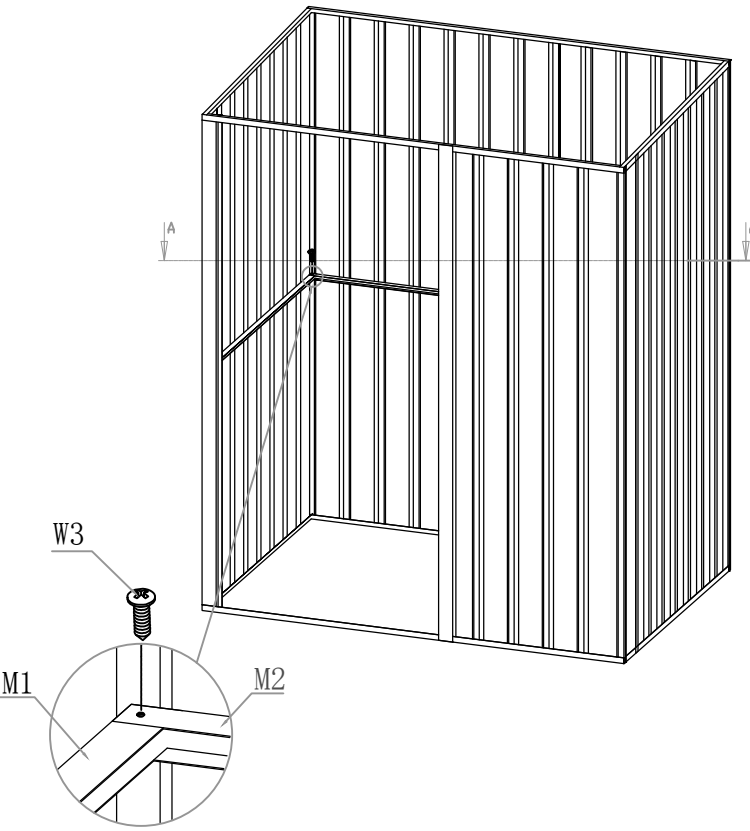8.Add the Bracing M1,M2, and M3 as per image A-A to the wall.


A-A





QTY:1


SKETCH	PART NO.	QTY
	M1	1
	M2	2
	M3	1
	W3	15

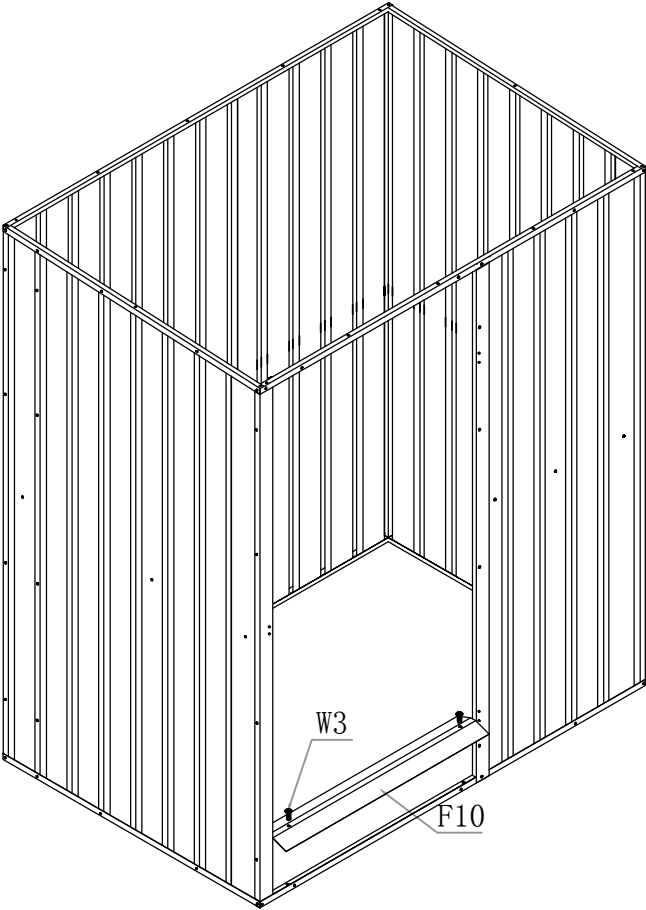

9.Add F10 with screws



SKETCH	PART NO.	QTY
	F10	1
	W3	2

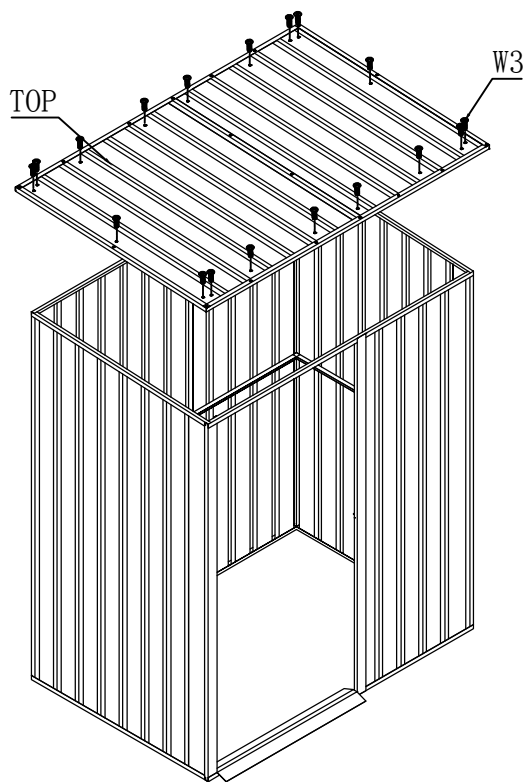
10. Put the TOP roof on the roof, tighten them at pre-punched location with screws.





SKETCH	PART NO.	QTY
	TOP	1
	W3	17











11. Left door assembly

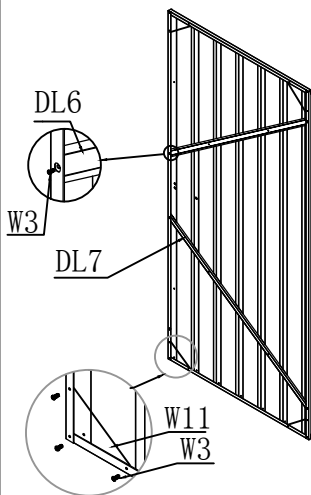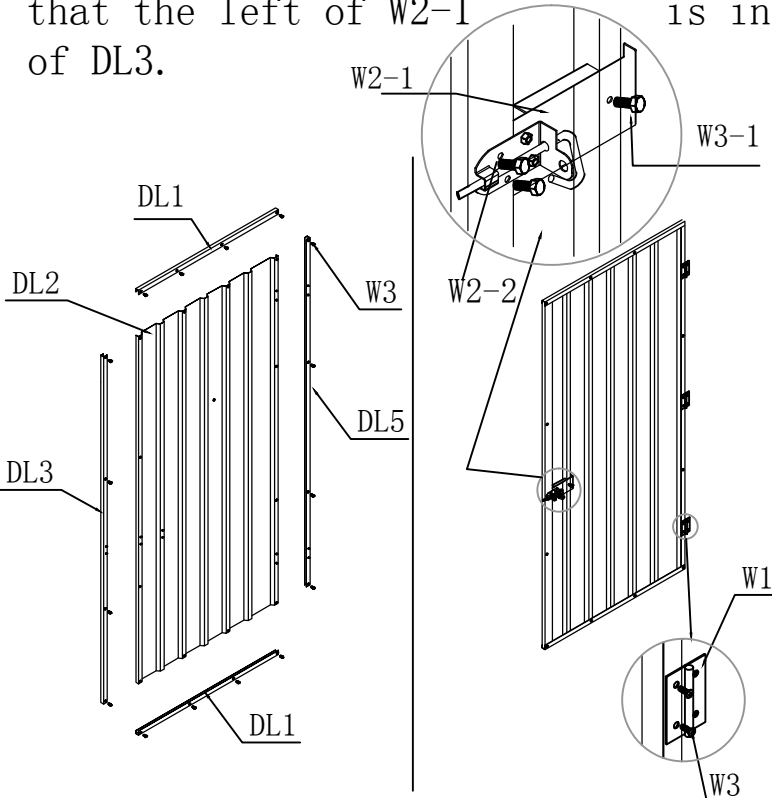

Install DL3 DL5 DL1 and DL4 to the sheet DL2,  
Use the bolts and nuts W3-1 to joint the latch W2-2 to the bracket W2-1  
as drawing "a" first and then fix the whole piece  
of "a" to Channel DL3 and the door panel. Pay attention  
that the left of W2-1 is inserted into the gap  
of DL3.




These 2 bolts  
without nuts as  
the tapping holes





SKETCH	PART NO.	QTY
	DL1	2
	DL2	1
	DL3	1
	DL5	1
	DL6	1
	DL7	1
	W1	3
	W2-1	1
	W2-2	1
	W3	38


	W11	4
	W3-1	5

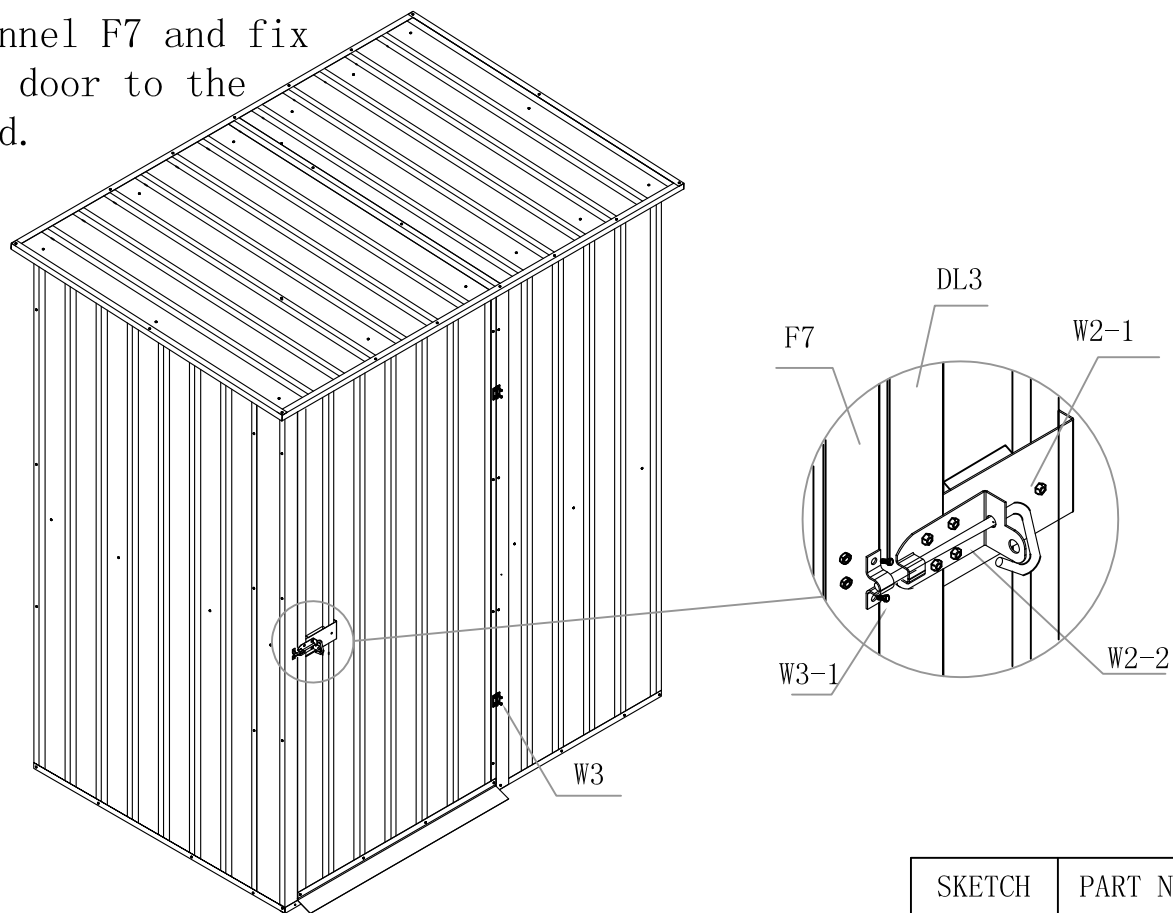

12. Use the W3-1 bolt and nut to fix the W2-2 's buckle to the Channel F7 and fix the door to the shed.




SKETCH	PART NO.	QTY
	W3	4
	W3-1	2

13.

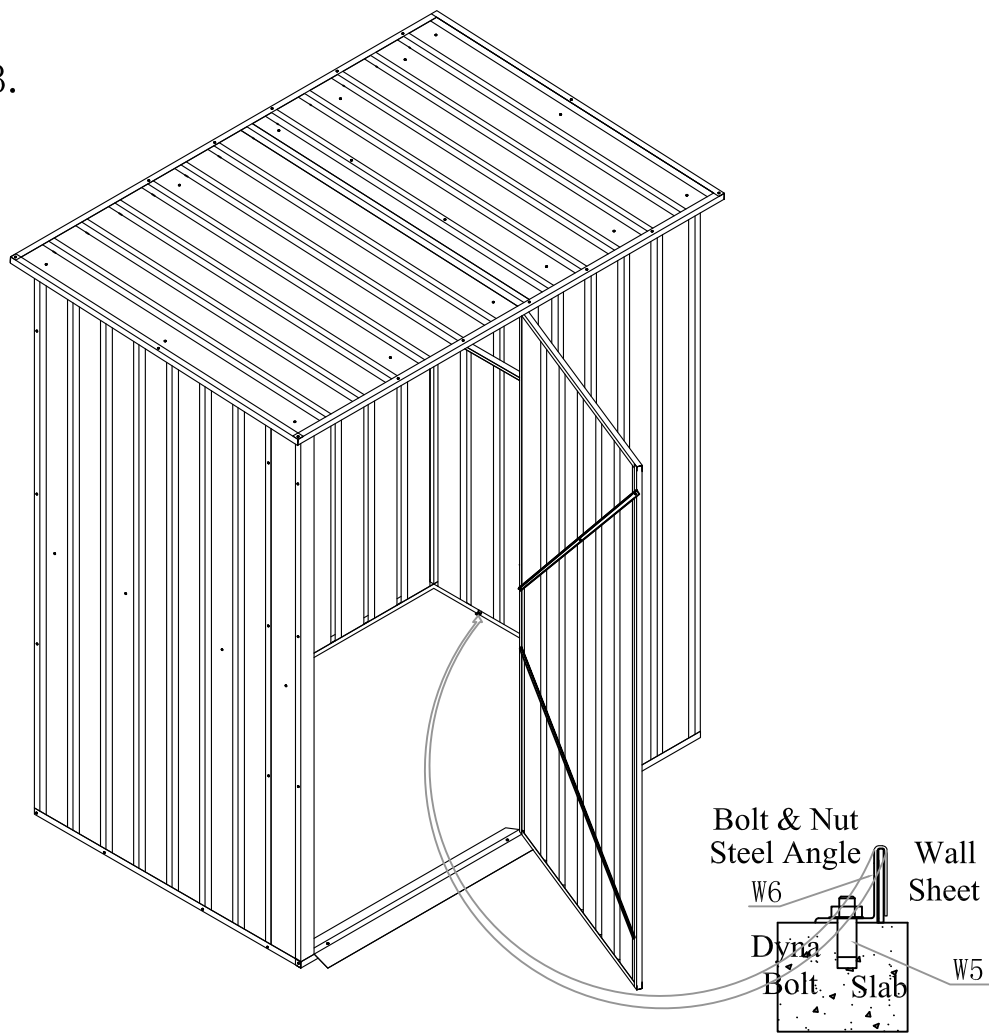

SKETCH	PART NO.	QTY
	W5	8
	W6	8

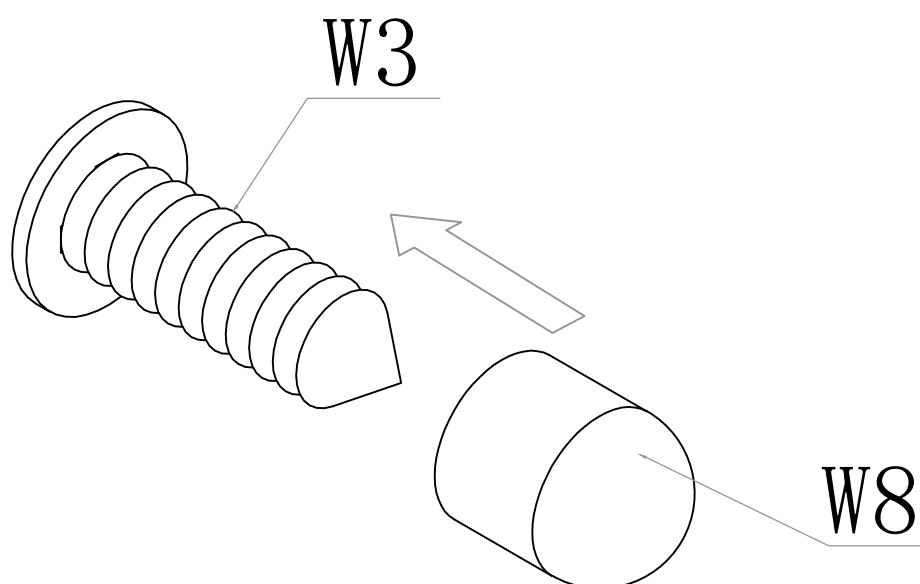

**Note:** please push 'screw cover' W8 onto the end of screws inside shed for covering screw sharp. On the place you need.