



## **2-in-1 BOOSTER CAR SEAT**

INSTRUCTIONS FOR USE

Suitable for children weighing 15kg to 36kg



### Notice

1. This is a "Universal" child restraint. It is approved to the EU Regulation No. 44, 04 series of amendments, for general use in vehicles and it will fit most, but not all, car seats.
2. A correct fit is likely if the vehicle manufacturer has declared in the vehicle's handbook that the vehicle is capable of accepting a Universal child restraint for this group.
3. This child restraint has been classified as "Universal" under more stringent conditions than those which applied to earlier designs which do not carry this notice.
4. If in doubt, consult either the child restraint manufacturer or the retailer.

Only suitable if the approved vehicles are fitted with 3 point safety-belts, approved to UN/ECE Regulation No. 16 or other equivalent standards.

## Contents

1.	<b>Applicability</b> .....	3
2.	<b>Safety Instructions</b> .....	4
3.	<b>Parts and interior equipment</b> .....	5
4.	<b>Usage for age (group II &amp; III)</b> .....	6
4.1	Height adjustment of head rest .....	6
4.2	Securing the child car seat with vehicle's belt .....	7
5.	<b>Care instructions</b> .....	10
5.1	Removing/ replacing the cover .....	10
5.2	Cleaning the cover .....	10
5.3	Care and maintenance .....	11
6.	<b>Procedure after an accident</b> .....	11

## NOTES


Please read through these instructions carefully before using the child car seat for the first time. You risk endangering your child's life if you use the product incorrectly.

### 1. Applicability:

This child car seat is suitable for weight categories II to III (Group II, III), which means children with a body weight between 15kg and 36kg.

Mass Group II:	15kg - 25kg
Mass Group III:	22kg - 36kg

- Only suitable if the approved vehicles are fitted with 3 point safety-belts, approved to UN/ECE Regulation No. 16 or other equivalent standards.

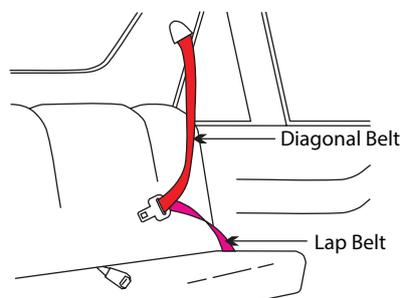


## **2. Safety Instructions**


**Please invest a few minutes in your child's safety to read these instructions. Many injuries, which are easily avoidable, are caused by carelessness and incorrect use.**

- These instructions must be retained with the child restraint for its life span.
- This child seat can only be installed facing forward, using a 3-point vehicle belt.
- Do not use this child seat at home. It is not designed for home use and should only be used in your car.
- Before each journey, check that the child car seat is installed firmly.
- Do not change the child car seat in any way.
- Do not leave children unattended in their child restraint system at any time.
- When the chair is not provided with a textile cover, the chair should be kept away from sunlight, otherwise it may be too hot for the child's skin.
- The rigid items and plastic parts of a child restraint must be so located and installed that they are not liable, during everyday use of the vehicle to become trapped by a movable seat or in a door of the vehicle.
- Always ensure that any straps holding the restraint to the vehicle are tight, any straps restraining the child are adjusted to the child's body, and straps are not twisted.
- Any luggage or other objects liable to cause injuries in the event of a collision shall be properly secured.
- The child restraint must not be used without the cover.
- The seat cover should not be replaced with any other than the one recommended by the manufacturer, because the cover constitutes an integral part of the restraint performance.
- Do not continue to use the child car seat if parts have become damaged or have loosened after an accident.

- The back rest of the child car seat has to rest flat against the back of the vehicle seat. If necessary, adjust the head rest of the vehicle seat for clearance.
- Do not use any load bearing contact points other than those described in these instructions and marked on the child car seat.
- When driving without a child in the child car seat, always secure the seat with the adult belt.
- The child car seat should be used on the back seat of the car only.
- Ensure that any lap strap is worn low down, so that the pelvis is firmly engaged.
- Do not cover anything on child car seat when using it.
- It is dangerous to make any alterations or additions to the child car seat without the approval of a competent authority, or to not follow closely the installation instructions provided by the child restraint manufacturer.

### 3. Parts and interior equipment

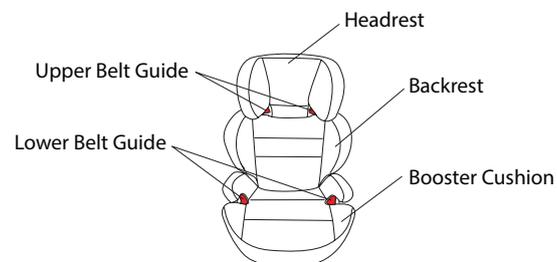

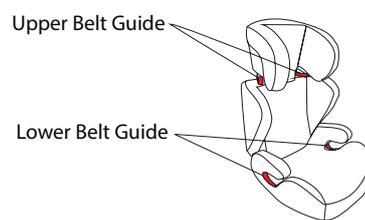

On the underside of the seat base, there is a clip in cup. This may be popped out for use. It can be snapped into the rectangular socket on either side of the seat for use.

#### 4. Usage for Groups II and III

Only the 3-point vehicle belt system can be used to buckle up the child car seat.

##### 4.1 Height adjustment of head rest

- Regularly check whether the headrest is set optimally to your child.
- The height of the headrest is set optimally to the size of your child when their head rests comfortably in the middle of the headrest.

**Step 1:** Hold the seat portion firmly and adjust the height of the headrest with another hand by pulling up the handle on the rear of the headrest (Fig 1.)

**Step 2:** Release the headrest at the proper position. Please check the headrest is clicked correctly into a locking position.

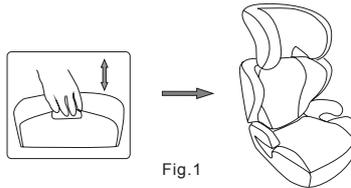


Fig.1

#### 4.2 Securing the child car seat with 3-point vehicle seat belt

The vehicle's 3-point belt system may only be used to buckle up children of Groups II and III (15kg - 36kg).

**Step 1:** Place the child safety seat on the vehicle's seat ensuring it is firmly pressed against the car seat backrest (Fig 2.)

**Step 2.** Seat your child in the child car seat (Fig 3.)



Fig. 2



Fig. 3

**Step 3:** Pull out the 3-point safety belt of the vehicle and place the lap belt through the Lower Belt Guide (Fig 4.)

Draw the seat belt across the child, and place both the lap and diagonal belts through the Lower Belt Guide on the opposite side (Fig 5.)

Lower the waist belt onto the child's pelvis and check to make sure the safety belt is not twisted. Fasten the safety belt into the buckle of the vehicle (Fig 6.)


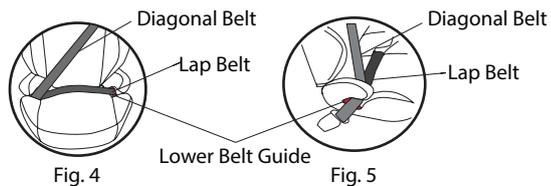


Fig. 4

Fig. 5

**Step 4:** Place the diagonal belt through the Upper Belt Guide (red hook) at the side of the headrest and ensure it is fully retained by the hook. Check and make sure the belt is not twisted (Fig 7.) Please make sure the position of the safety-belt is not near the throat to avoid any risk of strangling.

- The correct location of the adult safety-belt buckle relative to the child car seat is as shown in Fig 6.

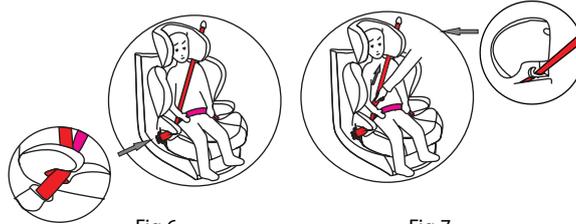

**This seat can also be used with the base only, as a plain booster.**

*Before use:*

**Inspect**

- child restraint free of damage

**Verify Child within Size Range**

- weight between 15kg and 36kg
- height eyes below top of vehicle seat back or headrest

**Install Booster Forward-Facing in Safe Location in Vehicle**

- vehicle seats that face front of vehicle only
- child facing front of vehicle
- compatible 3-point vehicle seat belts

#### Secure Child Properly in Booster

- correct vehicle belt fit (across shoulder and lap)
- vehicle belt not twisted
- vehicle lap belt under arm rests
- vehicle shoulder belt over arm rest

#### Installation in vehicle


**Step 1:** Hold the seat portion firmly, and push the back of the car seat to the horizontal position. (Fig 8.) Lift the back off the hinge and put aside.

**Step 2:** Put the booster on a forward facing vehicle seat.

**Step 3:** Have child sit on booster seat so their back contacts vehicle seat from shoulders to bottom.

**Step 4:** Position vehicle belt over child. Make sure the vehicle lap belt passes underneath both armrests of the booster seat, and the vehicle shoulder belt passes over the armrest on the side where the seat belt is buckled (9a). Check that the vehicle belt is not twisted and then buckle it.

**Step 5:** The vehicle belt must pass over the centre of the child's shoulder (9b).

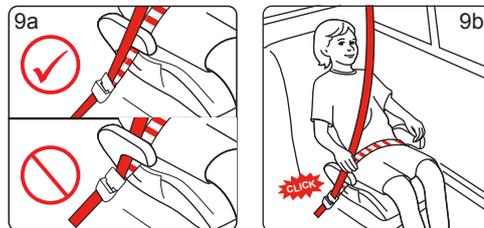

## 5. Daily Caring Instructions

### 5.1 To remove the cover

**Step 1:** Hold the seat portion firmly, and push the back of the car seat to the horizontal position (Fig 8).

**Step 2:** Unhook and disconnect the seat and back.

**Step 3:** Unsnap the studs at the bottom rear of the back cover and pull the cover off towards the front.

**Step 4:** Remove the headrest cover by unsnapping the stud at the bottom front and pulling the back edge of the cover up over the top.

**Step 5:** Remove the seat cover by unfastening the velcro strap across the back, pull the cover out from behind the red sockets and red belt guides at both sides, and then pulling it off towards the front.

- To replace the covers, proceed in reverse order.


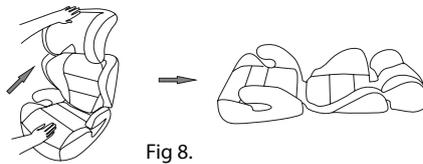


Fig 8.

### 5.2 Cleaning the cover

Use only neutral detergent and warm water to wash. Do not wash by machine. Spin-drying and tumble-drying are not recommended.

THIS COVER SHOULD BE HAND WASHED



### **5.3 Care and maintenance**

It is necessary to check the functions and components of the child car seat periodically according to these instructions in order to avoid any accidents.

Make sure you have checked the safety buckle is firmly locked by pulling on the safety belt.

Avoiding storing the child car seat in damp or cold locations for long periods.

### **6. Procedure after accident**

The child car seat must be replaced when it has been subject to violent stresses in an accident. Do not continue to use, as there may be hidden damage or weaknesses caused by the accident.

Made in China

Manufactured for:  
The Warehouse Ltd.  
26 The Warehouse Way  
Northcote, Auckland.  
0800 422 274.