



# AMPD

**IGNT-2** PORTABLE SPEAKER  
& AMPLIFIER

USER MANUAL

# TABLE OF CONTENTS

## **Safety Instructions**

Important Safety Instructions ..... 2

## **Getting to Know the IGNT-2**

What's in the Box ..... 4

Getting to Know the IGNT-2 ..... 4

## **Powering and Charging the IGNT-2**

Powering and Charging ..... 6

Battery Life Indication ..... 7

Standby Instructions..... 8

## **Connecting the IGNT-2**

Making a Bluetooth Connection ..... 9

NFC Pairing..... 10

Pairing Two IGNT-2 Speakers ..... 11

Connecting a Guitar or

Microphone ..... 12

## **Tuning and Storing FM Radio Stations**

Manual Tuning ..... 13

Automatic Tuning..... 13

Storing FM Radio Stations..... 14

## **USB Charging**

USB Charging ..... 14

## **Night Light Operation**

Night Light Operation ..... 15

## **Making EQ Adjustments**

Making EQ Adjustments ..... 15

## **Having Issues with the IGNT-2?**

Having Issues? ..... 16

## **Specifications**

IGNT-2 Specifications ..... 17

## **Warranty**

IGNT-2 Warranty..... 18

# IMPORTANT SAFETY INSTRUCTIONS

## Symbols



The lightning bolt with an arrowhead within an equilateral triangle is intended to alert the user to the presence of uninsulated 'dangerous voltage' within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



To reduce the risk of electric shock, **DO NOT** remove cover or back. No user serviceable parts inside. Refer servicing to qualified service personnel.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.

**Please read this instruction manual carefully and completely before using the product, and retain for future use.**

Make this instruction manual easily accessible to all users at all times. Always include this instruction manual when passing the product on to third parties. Please retain manual for all future use.

Use the product with care and store it in a clean dust free environment. Turn off the speaker after use to conserve battery power.

Only use the supplied accessories supplied with the speaker.

Keep out of reach of young children. This apparatus is not suitable for use by young children or infirm persons without supervi-

sion. Young children must be supervised to ensure that they do not play with the apparatus.

DO NOT block any ventilation openings.

Install in accordance with any specific manufacturer's instructions. Always allow a sufficient gap around the apparatus to avoid overheating.

**WARNING!** Do not place near any naked flame source, such as lighted candles on the electrical apparatus.

# IMPORTANT SAFETY INSTRUCTIONS

For household use only, this apparatus is not intended for commercial use.

DO NOT attempt to service this apparatus. This apparatus requires specialist servicing and knowledge to retain the safety of the apparatus.

**WARNING!** Do not insert any objects into any openings of the electrical appliance

DO NOT place near any heat source such as radiators, gas heaters, stoves or other heating apparatus.

AVOID any exposure to direct heat or direct sunlight.

Unplug this apparatus during lightning storms or when unused for long periods of time.

Do not leave the speaker on charge for extended periods of time.

Electrical and electronic appliances contain materials and substances which, if handled or disposed of incorrectly, could be potentially hazardous on the environment and human health.

Observe any local regulations regarding the disposal of electrical consumer goods and batteries and dispose of it appropriately.

No liability will be accepted for any personal injury or damage caused by failure to follow these instructions.

This product contains materials that should not be disposed of with your household waste. Instead, it is your responsibility to dispose of your waste equipment by handing it over to a designated collection point for the recycling of waste electrical and electronic equipment. The separate collection and recycling of your waste equipment at the time of disposal will help conserve natural resources and ensure that it is recycled in a manner that protects human health and the environment.

**IMPORTANT!** IPX4 Water Resistant Rating. IPX4 offers protection from a splash of water.

**IMPORTANT!** This product is NOT waterproof. Do not submerge this product in water.

This product is not protected from strong ingress of water.

**WARNING!** Connect to a suitable 230-240V ~ 50 Hz power supply only. If a class 1 product it must be connected to a suitably earthed mains socket.


Do not abuse or damage a power cord. If any power cord is damaged, it must be replaced by the manufacturer, its service agent or a similarly qualified person in order to avoid a hazard. A replaceable cord must be replaced with an authorised replacement from an authorised service agent only.

# WHAT'S IN THE BOX

Please check that all appropriate accessories have been supplied. The IGNT-2 includes the following:


- IGNT-2 Speaker and Amplifier
- Power Cable
- Cable Storage Bag
- User Manual
- Quick Start Guide

# GETTING TO KNOW THE IGNT-2

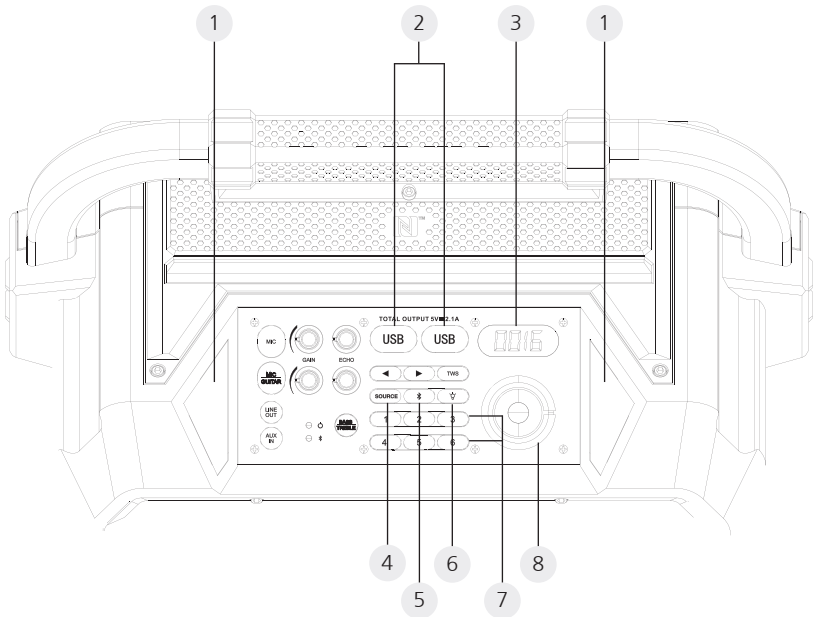

- |                         |                                  |
|-------------------------|----------------------------------|
| 1. White LED lights     | 5. Bluetooth Button              |
| 2. USB Ports            | 6. Light Switch                  |
| 3. LED Interface        | 7. FM Radio Presets / EQ Presets |
| 4. Source Select Button | 8. Volume Control Knob           |

# GETTING TO KNOW THE IGNT-2

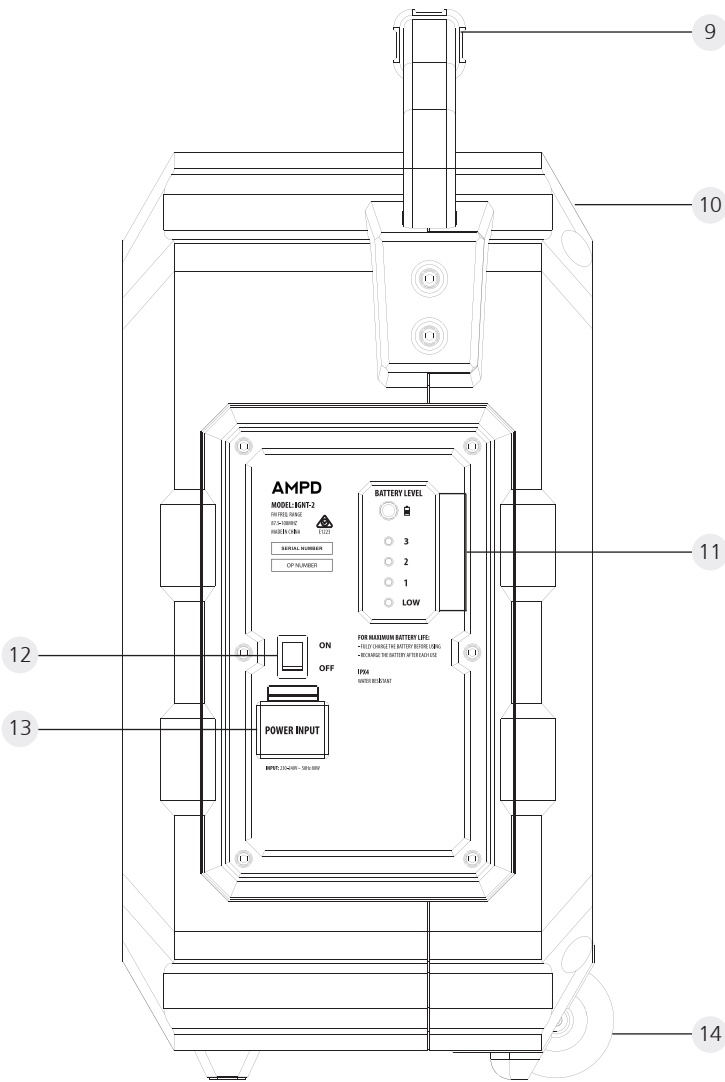

- 9. Handle
- 10. Telescopic Pull-Up Handle
- 11. Battery Level Indication Lights
- 12. Power ON / OFF Switch
- 13. AC Outlet
- 14. Wheels


# POWERING AND CHARGING THE IGNT-2

## Power Connection

1. Connect the AC cable included with the IGNT-2 to AC power input on the side of the unit.
2. Connect the AC plug to the appropriate 230-240V~50 Hz wall outlet.
3. Press the ON / OFF switch on the side panel of the speaker.

When you speaker is on LOW Battery the Low LED will flash red.

**IMPORTANT:** Please only use the AC cable supplied with the unit.

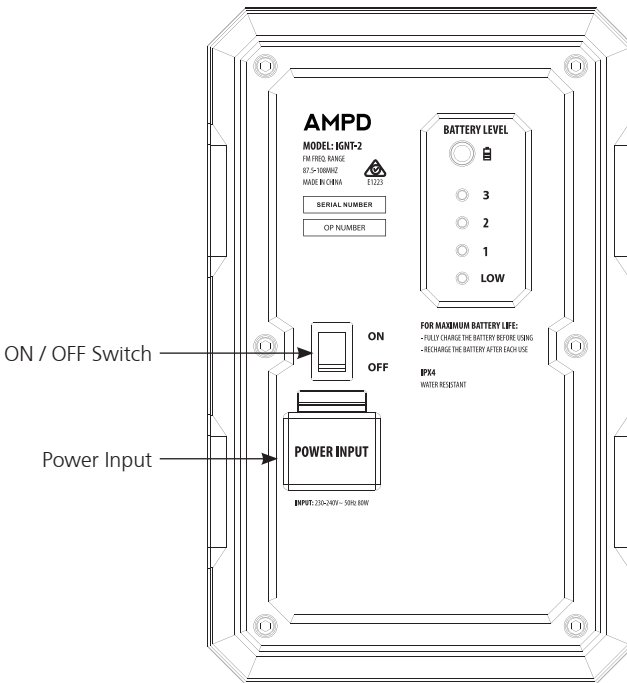

## Charging the IGNT-2

The IGNT-2 will automatically begin charging when you connect the AC cable to the side of the speaker and plug it into an appropriate 230-240V~50 Hz wall outlet.


For first time use we recommend charging your the IGNT-2 for a minimum of **8-10 hours** before using.

# POWERING AND CHARGING THE IGNT-2

## Battery Life Indication

When the IGNT-2 is not connected to mains power, you can check its battery life by pressing the battery indicator button on the side panel of the speaker.

When the IGNT-2 is on low battery, the Low LED will flash red.

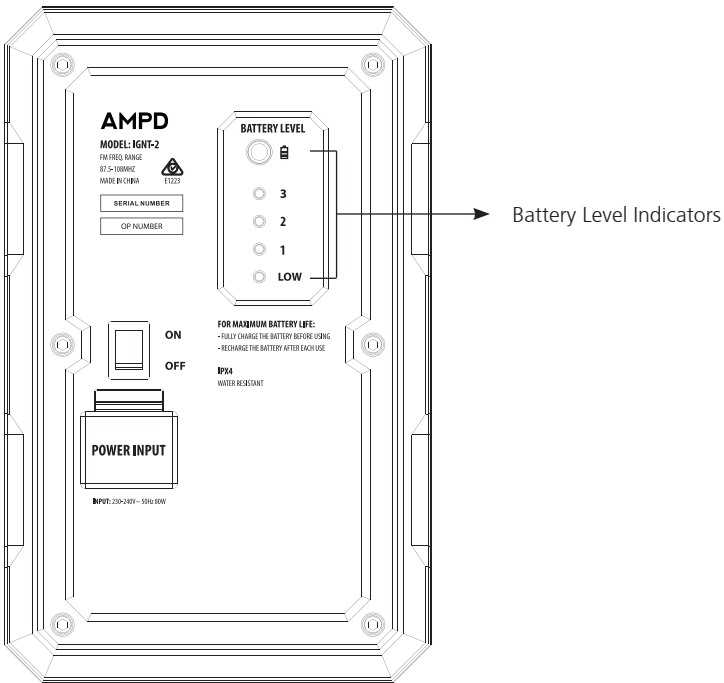



# STANDBY INSTRUCTIONS


There is a main power switch on the IGNT-2 which will power the IGNT-2 speaker ON / OFF. The IGNT-2 also has Standby ON / OFF function.

## Turning Standby ON / OFF

To turn Standby ON / OFF, push down on the main volume knob. When in standby mode the green LED light will remain a constant green.

## Auto Standby

When there is no interaction with the speaker for 15 minutes, the speaker will automatically go to Standby Mode. To exit Standby Mode, press and hold the main volume knob for 1 second.

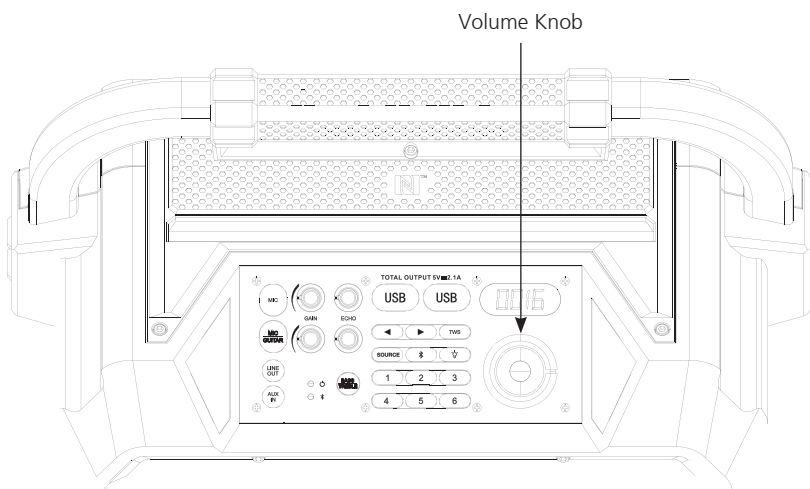

# MAKING A BLUETOOTH CONNECTION

Bluetooth Technology allows you to wirelessly pair music to your IGNT-2 speaker using a Bluetooth enabled device such as tablet or mobile phone.

Please ensure your selected device is Bluetooth compatible before selecting your device to pair to the IGNT-2 speaker.

## Manual Bluetooth Pairing

1. Ensure the IGNT-2 speaker and selected Bluetooth device are no more than 3 feet apart for the initial connection.

**Note:** Once connected, you can increase this distance up to 10 metres.


2. On the top panel of the IGNT-2, press the source button until 'BT' is displayed on LED screen.

3. Press the Bluetooth button on the top panel to enter Bluetooth **Pairing Mode**.  
When your IGNT-2 is in Bluetooth pairing mode, the Bluetooth LED will flash blue.

4. Search your Bluetooth-enabled device for IGNT-2 and connect.

**Note:** If your device requires a password, please use '0000'

5. Once a connection is established, the IGNT-2 will indicate that it is connected and the Bluetooth LED will remain a constant blue.

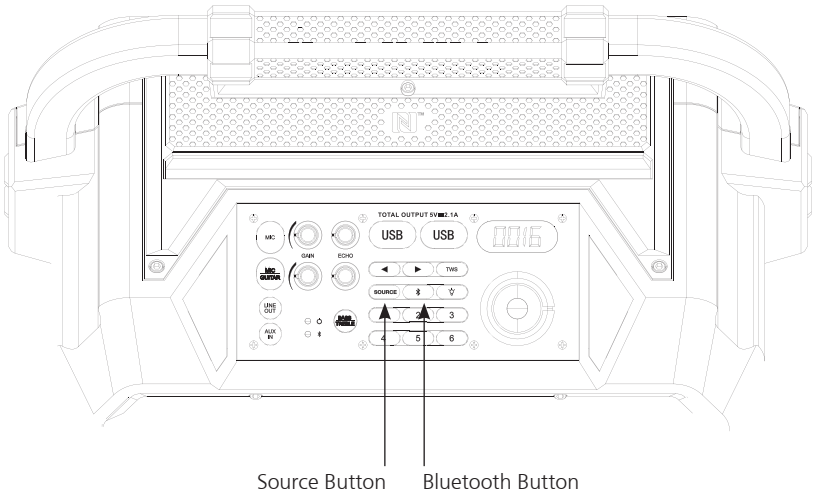


# MAKING A BLUETOOTH CONNECTION

## NFC Pairing

NFC or Near Field Communication enables pairing of two devices by simply bringing your NFC enabled device within centimetres of the NFC area on the IGNT-2.

1. Turn on the NFC function on your selected device.
2. Place your NFC-enabled device on the symbol 'NFC' on top of the IGNT-2 speaker.
3. Once a connection is established, the Bluetooth LED light will remain a constant blue.

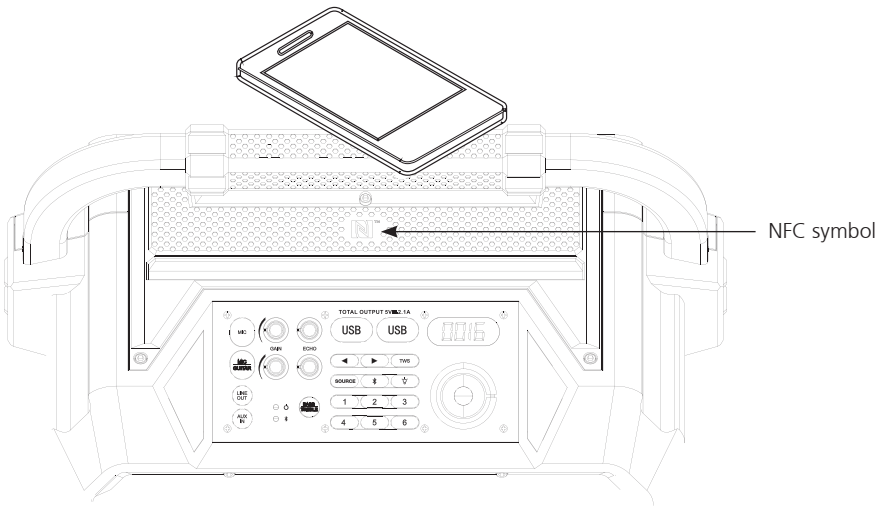

# PAIRING TWO IGNT-2 SPEAKERS


The IGNT-2 is equipped with a technology called TWS (True Wireless Stereo) that allows you to dual pair two IGNT-2 speakers together wirelessly. This wireless dual pairing will provide you with true 2.0 stereo (left and right) audio.

## IMPORTANT

- Dual pairing is only available in Bluetooth mode.
- You need two IGNT-2 speakers to dual pair. You cannot wirelessly dual pair with other AMPD models or other branded products.

To set up dual pairing between two IGNT-2 speakers, please follow these steps:

1. Switch the source to BT mode; the blue LED indicator will flash and start to search the Bluetooth device. The blue LED indicator stops flashing and becomes a solid blue light when connected with Bluetooth device successfully. (Refer to Bluetooth instructions for full instructions).
2. Short press TWS button on the IGNT-2 unit which is connected with Bluetooth device. When in TWS mode, the blue LED will remain stable and the red LED will flash.
3. Short press TWS button of the second IGNT-2 which is NOT connected with your Bluetooth device. In TWS mode, the red LED indicator will fast flash and blue LED indicator light is OFF.
4. After about 10 seconds, the red and blue LED indicator will be solid on the unit connected to the Bluetooth device. The red LED indicator light will be a solid red on the IGNT-2 which is **not** connected to the Bluetooth device.
5. To disconnect the two IGNT-2 speakers, short press the TWS button and the two units will disconnect.

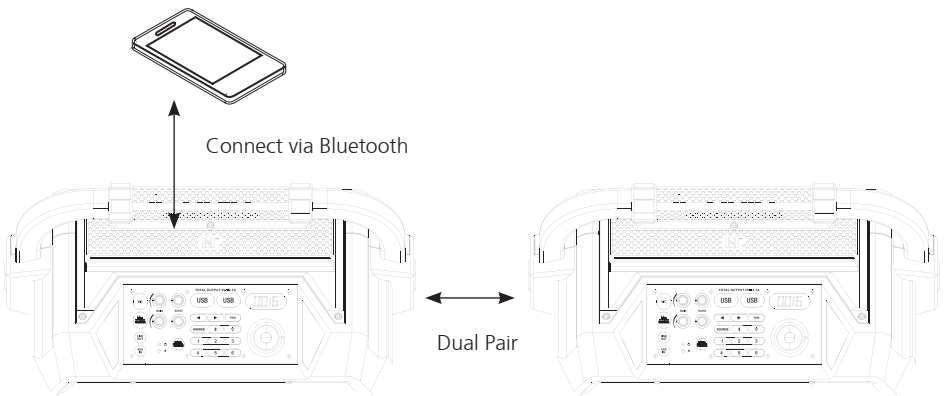


# CONNECTING A MICROPHONE OR GUITAR

You can connect a guitar and / or microphone to your IGNT-2 speaker directly through the Microphone and Guitar inputs on the top panel.

**Microphone and Guitar Input:** 6.5mm


Gain and Echo can be controlled through the individual knobs located on the top panel of the IGNT-2.

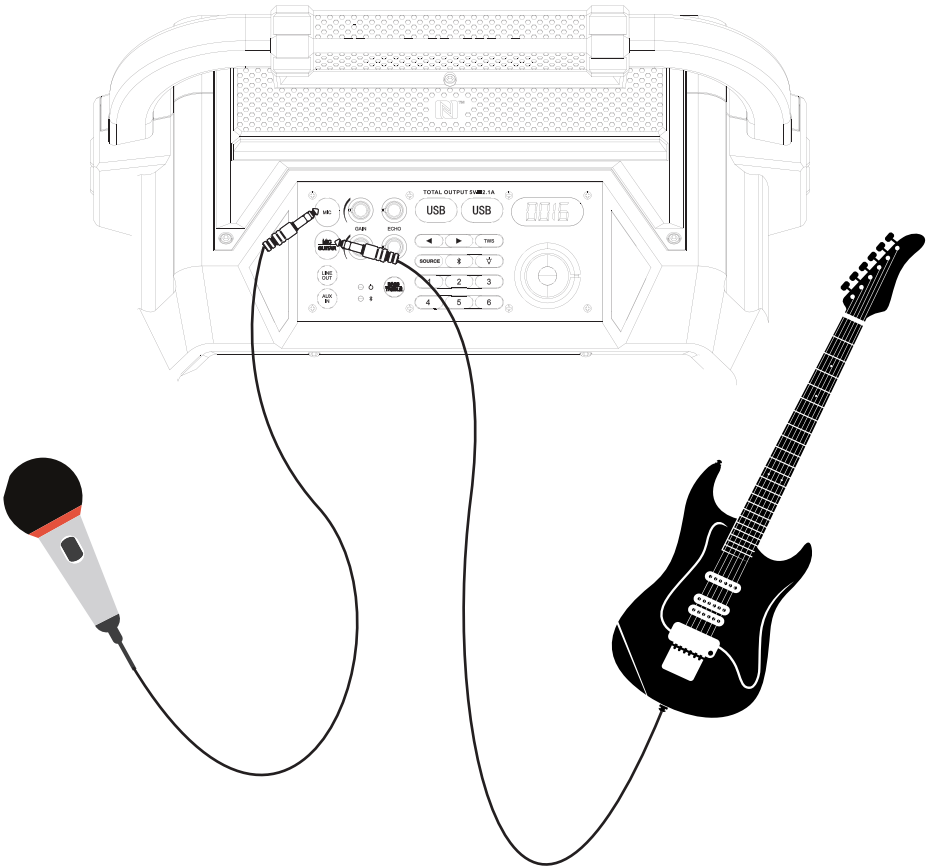

# TUNING AND STORING AN FM STATION

## Manually Tuning an FM Radio Station

1. Press the SOURCE button to select FM source.
2. Short press the ◀ ▶ buttons on the top panel of the IGNT-2 speaker to manually tune FM radio stations and find your desired frequency.
3. Move the IGNT-2 to find the ideal reception for your selected station / frequency.

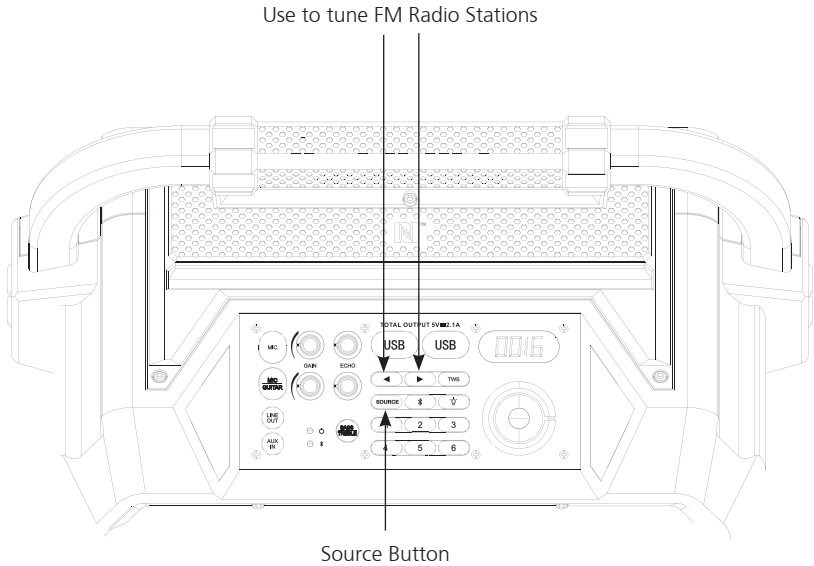


## Automatically Tuning an FM Radio Station

1. Press the SOURCE button to select FM source.
2. Press and hold the ◀ ▶ buttons to automatically tune the next and strongest radio station signal.

# TUNING AND STORING AN FM STATION

## Storing an FM Radio Station

1. Press the SOURCE button to select FM source.
2. Automatically or manually tune your desired frequency / station.
3. Press and hold a number key (1-6), the corresponding number will blink on the display and the station will be stored.

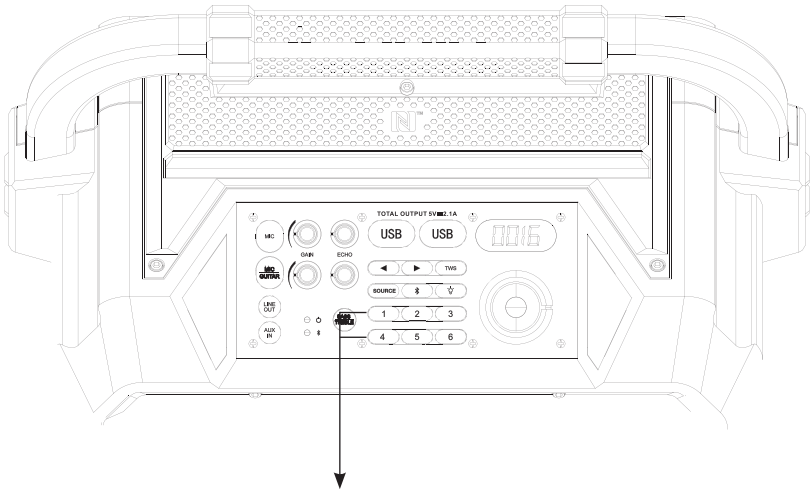

FM Radio Station Presets

## USB CHARGING

The IGNT-2 has a built-in power bank that allows you to charge device(s) from either of the two USB ports on the top panel. The combined output of the two USB ports is 2.1 Amps.


Connect a USB cable (not included) to one of the two USB ports, and connect your device to begin charging.


### IMPORTANT

- Please take note of the required USB port specification for charging of particular devices. 2.1A is the combined output of the two USB ports.
- The USB ports are only intended for USB charging - they are **not** intended for USB media playback.

# NIGHT LIGHT OPERATION

The IGNT-2 is equipped with white LED lights to help with use in dark environments or at night.

Press the  button on the top panel to turn on the lights. This will automatically switch on to the lowest brightness level.

There are 4 levels of brightness. Press the  to select the desired brightness.


# MAKING EQ ADJUSTMENTS

## Manual EQ Adjustments

The IGNT-2 sound performance can be adjusted through bass and treble controls located on the top panel of the speaker.

Press the BASS / TREBLE button to enter BASS and adjust using the main volume control.

Press the BASS / TREBLE button again to enter TREBLE and adjust using the main volume control knob.

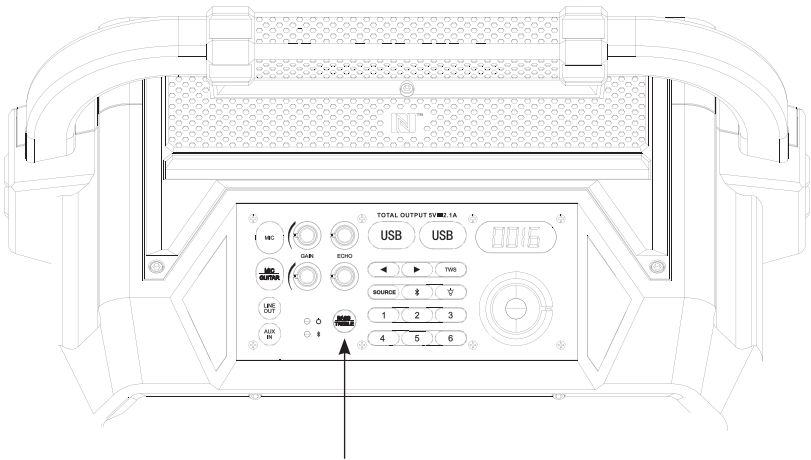

Bass / Trouble Button

## EQ Presets

When in Bluetooth mode, or if you have a device connected via AUX, you can set the IGNT-2 to any of the EQ Presets by pressing the 1-6 keys.

- |   |        |   |           |
|---|--------|---|-----------|
| 1 | Normal | 4 | Pop       |
| 2 | Jazz   | 5 | Classical |
| 3 | Rock   | 6 | Default   |



# HAVING ISSUES WITH THE IGNT-2?

## No Power

1. Check that the AC power cord is securely inserted to the side AC Power Input on the side of the IGNT-2 speaker.
2. Check the mains power switch is turned to the ON Position.
3. Ensure there is charge left in the battery.

## No Sound

1. Make sure the device connected by AUX cable to the IGNT-2 has the volume set to a reasonable level.
2. Make sure the device connected by Bluetooth has the volume set to a reasonable level.
3. Ensure there is substantial charge left in the battery of the device connected as well as the IGNT-2 speaker.
4. Ensure any direct line connection (AUX, MIC, GUITAR) to the IGNT-2 speaker are secure and connected properly.

## Cannot Tune a Desired FM Radio Station

1. Check regional FM stations to ensure your selected station is available.
2. Move your speaker to an open space and adjust position of speaker for ideal reception.

## Cannot Pair to the IGNT-2 Speaker via Bluetooth

1. Make sure both Bluetooth device and the IGNT-2 speaker are not connected to any other Bluetooth devices.
2. Make sure the blue LED is in pair state (the blue LED will flash blue if it is in pairing state).
3. Turn main power switch OFF, and then turn ON again. Press and hold Bluetooth button to reach pairing state and try again.

# SPECIFICATIONS

<b>Input Sources</b>	Bluetooth / AUX / FM / Microphone / Guitar
<b>Bluetooth Range</b>	8-10 metres (no obstacles)
<b>Power Input</b>	230-240V ~ 50Hz
<b>Product Dimensions</b>	42.4 x 52.3 x 22.9 cm
<b>Approx Weight</b>	9.5kg
<b>Output</b>	USB (5V/2.1A)

# AMPD WARRANTY

At AMPD, we believe in our products and manufacture to the highest standards.

Should your product have a fault caused by the manufacturer, we will happily replace or refund for up to 2 years from the date of purchase.

All benefits of the AMPD Manufacturer's Warranty are in addition to your rights under New Zealand and Australian Consumer Law. Our goods come with guarantees that cannot be excluded under New Zealand and Australian Consumer Law. You are entitled to a replacement or refund for major failure and compensation for any other reasonable foreseeable loss or damage.

This Warranty is limited to the replacement or refund under the Warranty Period of **2 years** from the date of purchase. It does not extend to any damage to the product including but not limited to: power surges, incorrect installation, insect infestation, commercial use, improper transit or failure to use the product in accordance with the operating instructions.

At AMPD, we are always happy to help and discuss any issues or faults that you may have experienced with your product.

For all AMPD product enquiries, please call:

**Australia Freephone** 1800 161 454

**New Zealand Freephone** 0800 89 85 80

In the instance your enquiry cannot be resolved over the phone, please take your Proof of Purchase along with your product to the original place of purchase.

**Oriental Pacific International Ltd**

**PO Box 302 158, North Harbour, Auckland, New Zealand**

**service@orientalpacific.com**